





DEFLECTION ANGLE

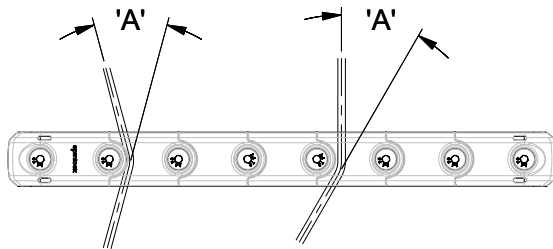

BISECTED ROPE ENTRY

STRAIGHT ROPE ENTRY

Rope Deflection Angle (°)	Max Rope Tension (kg)
10	2290
15	1530
30	770
45	520
60	400
90	280

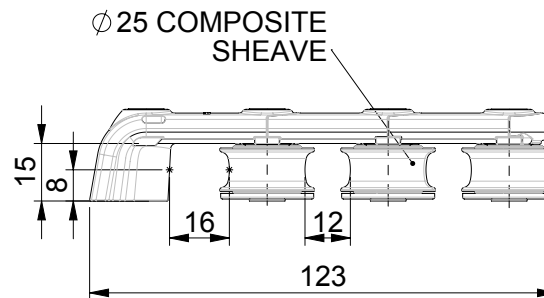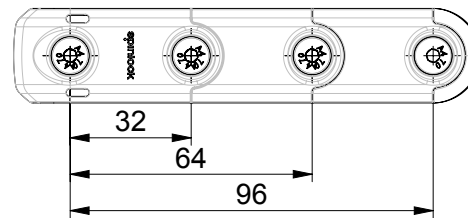

Ø 25 COMPOSITE SHEAVE

**spinlock**  
BE ADVENTURE-PROOF



**WARNING:**  
IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND **ALWAYS** CHECK DIMENSIONS BEFORE DRILLING.



**COPYRIGHT:**  
THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

ALL DIMENSIONS IN MM

FASTENERS

MAX LINE SIZE

WEIGHT

SWL PER SHEAVE

SWL PER UNIT

SCALE  
**1:2**

PAGE SIZE  
**A4**

DATE  
**APR 2018**

**M5 CSK x 4**

**10mm**

**78g**

**400kg**

**800kg**

**T25-3Y**

FOR MORE INFO CONTACT  
SPT@SPINLOCK.CO.UK