






DEFLECTION ANGLE

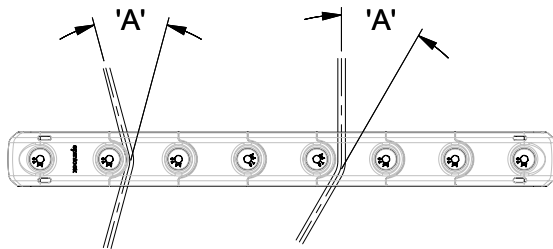

BISECTED ROPE ENTRY

STRAIGHT ROPE ENTRY

Rope Deflection Angle (°)	Max Rope Tension (kg)
10	2290
15	1530
30	770
45	520
60	400
90	280

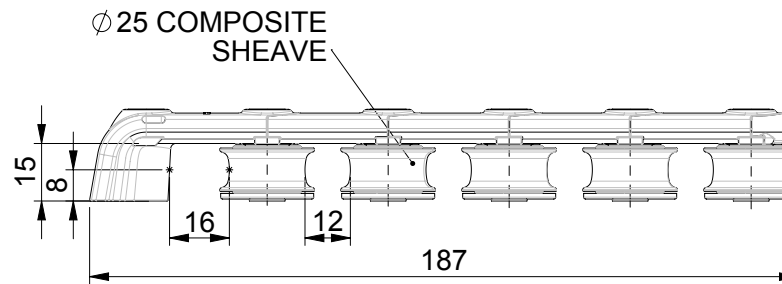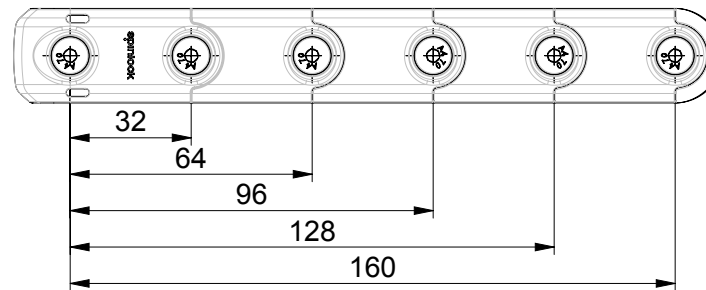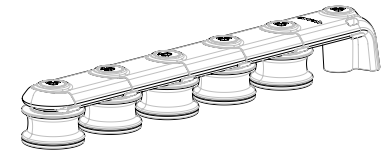

spinlock
BE ADVENTURE-PROOF



WARNING:
IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND **ALWAYS** CHECK DIMENSIONS BEFORE DRILLING.



COPYRIGHT:
THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

ALL DIMENSIONS IN MM

SCALE: 1:2
PAGE SIZE: A4
DATE: APR 2018

FASTENERS

M5 CSK x 6

MAX LINE SIZE

10mm

WEIGHT

111g

SWL PER SHEAVE

400kg

SWL PER UNIT

1200kg

T25-5Y

FOR MORE INFO CONTACT
SPT@SPINLOCK.CO.UK