



DEFLECTION ANGLE

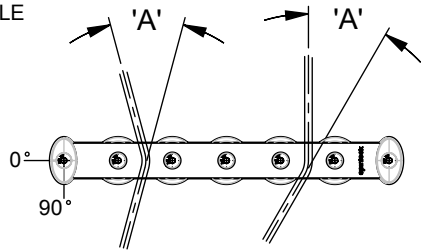




BISECTED ROPE ENTRY

STRAIGHT ROPE ENTRY

DEFLECTION ANGLE, 'A' (°)	MAX ROPE TENSION (KG)
10	3440
15	2300
30	1160
45	780
60	600
90	420

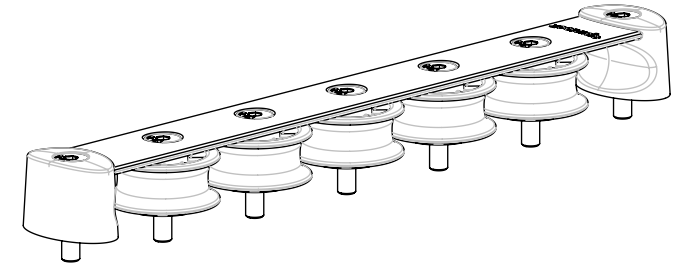

Ø 38 COMPOSITE SHEAVE (T38/5)  
ALLOY SHEAVE (T38/5A)

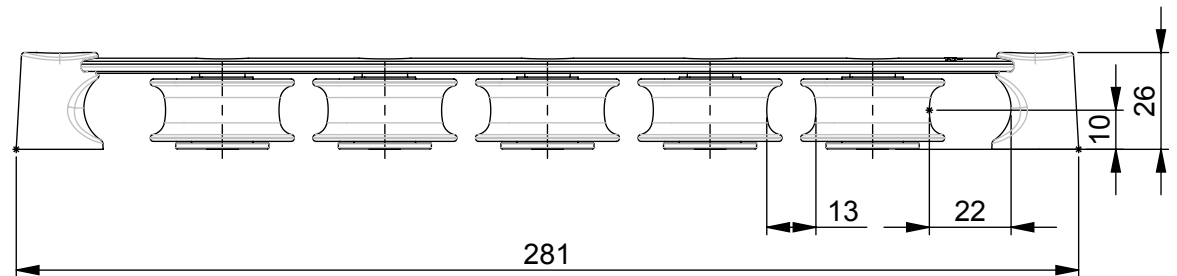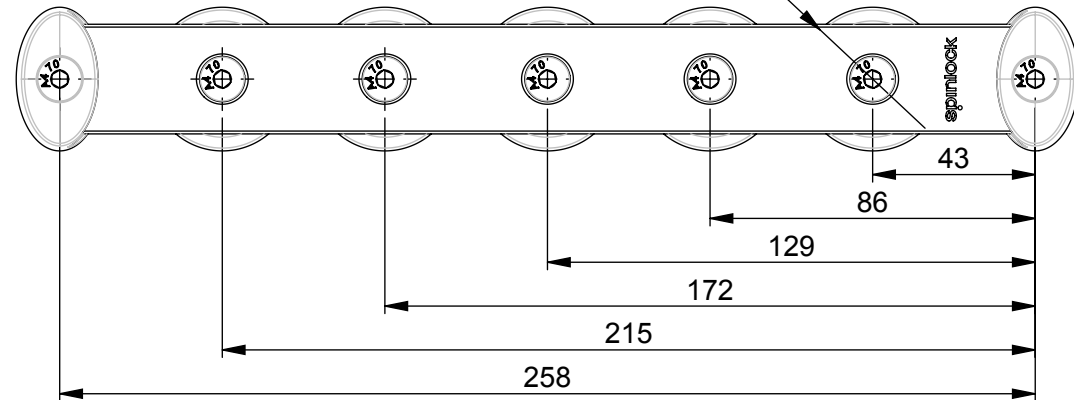

**spinlock**  
BE ADVENTURE-PROOF



**WARNING:**  
IF USING AS DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND **ALWAYS** CHECK DIMENSIONS BEFORE DRILLING.



**COPYRIGHT:**  
THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

ALL DIMENSIONS IN MM

SCALE PAGE SIZE DATE

1:2

A4

MAR 2018

LINE SIZE:  
6-12mm  
FASTENERS  
M6 CSK  
x 7

PRODUCT CODE

T38/5

T38/5A

WEIGHT

227g

323g

MAX LOAD

600kg

600kg

MAX LOAD PER UNIT

1500kg

1500kg

**T38/5**

FOR ANY MORE INFO CONTACT  
SPT@SPINLOCK.CO.UK